

## MEZZALUNA™ 6032 RH



### DIMENSIONS

60" x 32" x 18" ( 1524 x 813 x 457 mm)

The Radius of the apron is 78" or 45 Degrees

Whirlpool Operating Gallons = 40 (Liters = 151)

Gallon to Overflow = 65 (Liters = 246)




### MATERIAL

Acrylic

### TUB FLOOR

Textured

### UNDERMOUNT: No

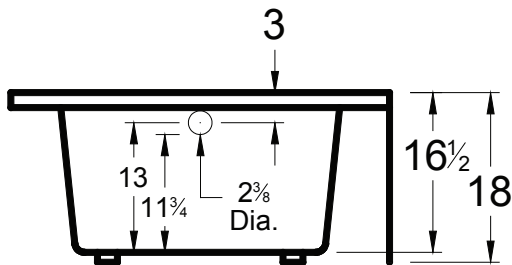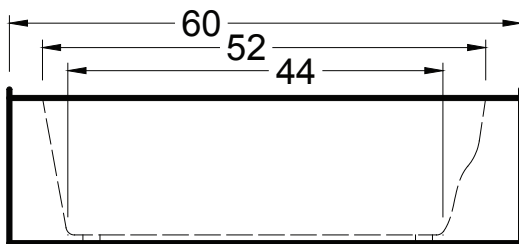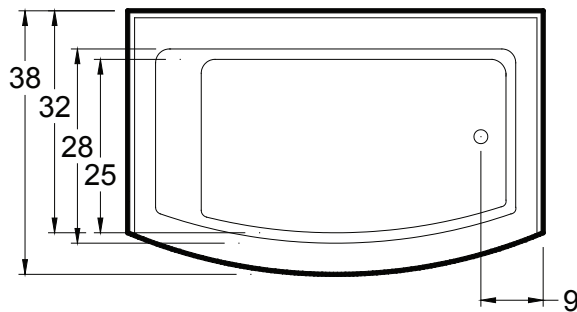

### CODES & COMPLIANCE

Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- Canadian Standards Association - (CSA)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8


Contact Americh for additional approvals.

### STANDARD EQUIPMENT


- Apron
- Molded Tile Flange
- Adjustable Feet

## BATHING SYSTEMS


## LEGEND

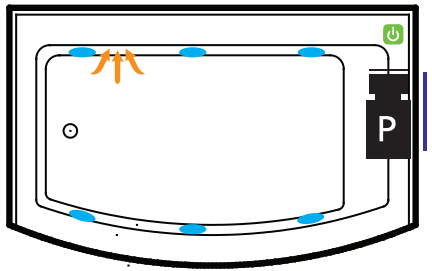


Builder Series

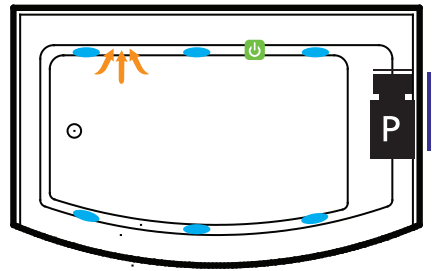


Luxury Series

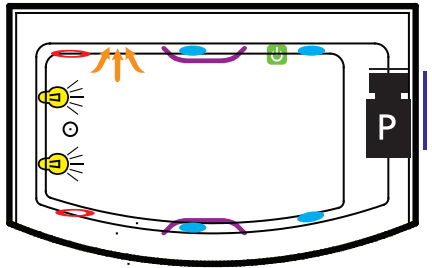


Platinum Series

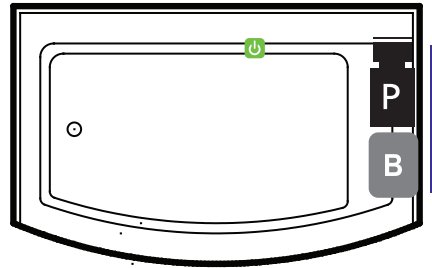

Combination  
(pump and blower location only)

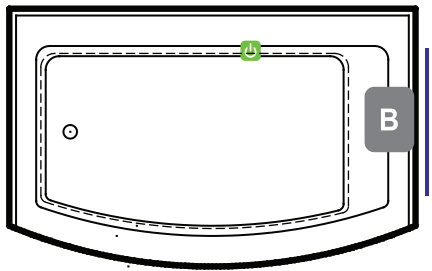

Airbath System II

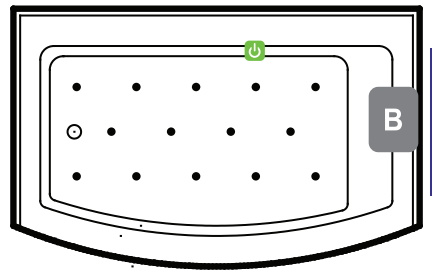

Airbath System III



Pump



Blower



Jet



Rotary Jet



Suction



Light



ON/OFF Control



Grab Bar



Access Panel  
(Minimum 16" X 20")

## OPTIONAL ACCESSORIES

- Chromatherapy\*
- Grab Bars: 9" \* - 14" - 16"
- High Density Insulation\*
- iBath Sound System
- Inline Heater (whirlpool only)
- Jets: Additional or Rotary\*
- Ozone System (whirlpool and/or Airbath only)
- Pillows: 12" \* - Angle
- Remote Control Upgrade (select series only)
- Syllent Pump with Heated Air\*
- Thermal Comfort System (TCS cannot be used with VSM)
- Trim Kit Upgrade\*
- Vibro Sonic Massage (VSM cannot be used with TCS)
- Waste & Overflows Upgrades
  - Cable Drive Waste & Overflow\*
  - PVC Waste & Overflow+
  - Linear Waste & Overflow

## INSTALLATION TIPS

- Install according to Owner's Manual and local codes..
- Any whirlpool or Airbath® unit requires an access panel.
- Hot water supply should be 65-75% of tub capacity or greater.
- Always consult your local plumber for recommendations as installations will vary.
- The combination of multiple systems and options may require components to stick out and/or be remotely installed in the field.

## ELECTRICAL REQUIREMENTS

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.

(\* Standard on Platinum Series (+) Standard on Luxury Series